
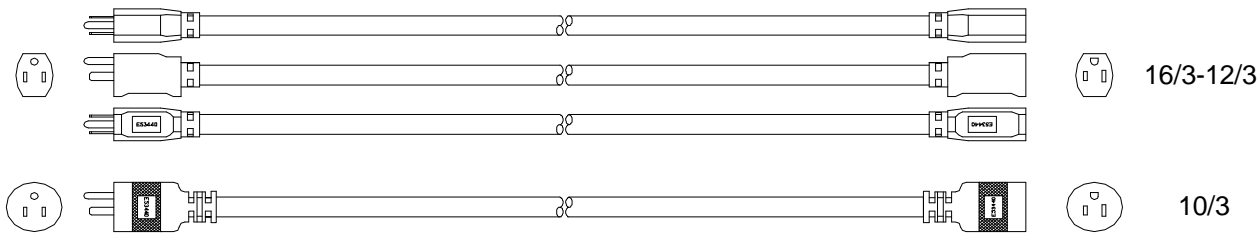




**PRODUCT SPECIFICATION**  
Controlled Document - Engineering Drive

**CATALOG NUMBER:** See table below  
**DESCRIPTION:** YELLOW JACKET<sup>®</sup> SJTW extension cord with power indicator light in the cord connector  
**APPROVALS:** UL Listed and CUL Listed or CSA certified (14-12 ga) Outdoor Use Cord Set

**CONSTRUCTION PARAMETERS:**  
 Conductor: See table below  
 Cable jacket material: Low temperature PVC, yellow  
 Cord rating: Hard Usage per the National Electrical Code  
 Overall cable O.D. (nom): See table below  
 Cable legend: Indent print, with black ink print  logo



*Note: Plug and cord connector style may vary*

Attachment plug configuration: NEMA 5-15P      Cord connector configuration: NEMA 5-15R  
 Plug and connector material: Clear PVC, with neon power indicator lamp in the cord connector

**ELECTRICAL AND ENVIRONMENTAL PROPERTIES:**  
 Cable temperature rating: -50 to +60 °C  
 Nominal operating voltage: 125 VAC  
 Maximum operating current: See table below

Catalog no.	Gauge	Length	Conductor	Cable O.D. (nom)	Current rating
2886	14/3	25 ft	41/30 BC	0.352 in	15A
2887		50 ft			
2888		100 ft			
2883	12/3	25 ft	65/30 BC	0.420 in	15A
2884		50 ft			
2885		100 ft			
2805	10/3	50 ft	104/30 BC	0.567 in	15A
2806		100 ft			

*This product complies with European Directive 2002/95/EC (RoHS)*

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.

